

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
21 October 2004 (21.10.2004)

PCT

(10) International Publication Number  
**WO 2004/091169 A1**

(51) International Patent Classification<sup>7</sup>: **H04L 29/06**,  
H04Q 11/00

(74) Agents: **HASSELGREN, Joakim et al.**; Kransell &  
Wennborg AB, Box 27834, S-115 93 Stockholm (SE).

(21) International Application Number:  
PCT/SE2004/000550

(22) International Filing Date: 7 April 2004 (07.04.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
0301096-4 14 April 2003 (14.04.2003) SE

(71) Applicant (for all designated States except US):  
**DELAVAL HOLDING AB** [SE/SE]; Box 39, S-147  
21 Tumba (SE).

(72) Inventors; and


(75) Inventors/Applicants (for US only): **SOLBERG, Inga-  
Lill** [SE/SE]; Hagvägen 57A, S-141 70 Huddinge (SE).  
**CARLSSON, Björn** [SE/SE]; Amanuensvägen 8, S-104  
05 Stockholm (SE).

(81) Designated States (unless otherwise indicated, for every  
kind of national protection available): AE, AG, AL, AM,  
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,  
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,  
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,  
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,  
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,  
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,  
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,  
ZW.

(84) Designated States (unless otherwise indicated, for every  
kind of regional protection available): ARIPO (BW, GH,  
GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),  
Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), Euro-  
pean (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR,  
GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK,  
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,  
ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: A TRANSPONDER READER CAPABLE OF READING TRANSPONDERS HAVING DIFFERENT SIGNALLING  
PROTOCOLS

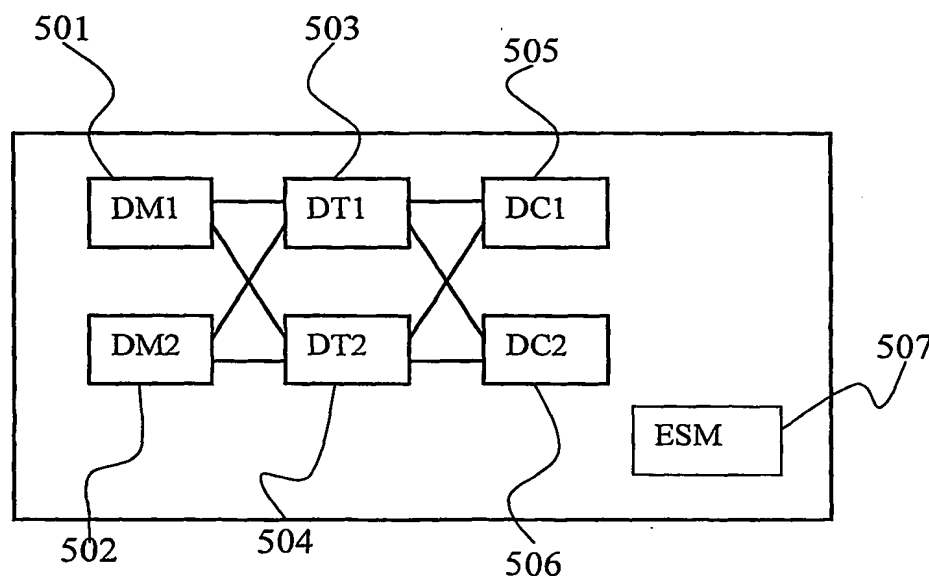

(57) Abstract: The present invention provides an apparatus and method that can in a simple and cost-effective way read transponders from different systems implementing different communication protocols. The transponder reader comprises an antenna means for sending a first analogue signal to one of said transponders and receiving a second analogue signal from said transponder, said transponder reader further comprises means for analysing, e.g. demodulating, detecting, decode said signal received by said antenna means according to at least two different protocols.

WO 2004/091169 A1



**Published:**

— with international search report

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

1  
A, transponder reader capable of reading transponders having different signalling protocols.

JC20 Rec'd PCT/PTO 11 OCT 2005

#### TECHNICAL FIELD

The present invention relates to a transponder reader and a method therefore. More specifically the present invention  
5 relates to a transponder reader capable of reading transponders having different signalling protocols.

#### BACKGROUND OF THE INVENTION

Transponders were originally electronic circuits that were attached to some item whose position or presence was to be  
10 determined. The transponder functioned by replying to an interrogation request received from an interrogator, or transponder reader, either by returning some data from the transponder such as an identity code or the value of a measurement, or returning the original properties of the  
15 signal received from the interrogator with virtually zero time delay, thereby allowing ranging measurements based on time of flight. As the interrogation signal is generally very powerful, and the returned signal is relatively weak, the returned signal would be swamped in the presence of the  
20 interrogation signal.

The functioning of the transponder was therefore to move some properties of the returned signal from that of the interrogation signal so that both could be detected simultaneously without the one swamping the other. The most  
25 common property to change is the transmission frequency meaning that the transponder might receive the interrogation frequency at one frequency, and respond on another frequency that is separated sufficiently with regard to frequency so that both may be detected simultaneously.

30 Transponder systems have recently started to become major players in the field of electronic identification. Within this

application, it is necessary to make the transponders as cheap as possible, and rather to build the sophistication into the readers. This lack of sophistication generally means that changing the transmission frequency is no longer an option, as the frequency translation needs expensive and complex tuned circuitry. Instead the transponders have given up the ranging ability and rather time slice the communications channel with the interrogator. Here the interrogator (called a reader) sends an interrogation signal for a limited time. The transponder receives the signal and waits for its completion, and then responds on the same frequency with its identity and data code.

The devices are sometimes called transponders and are also sometimes called tags, because their end application eventually will be the tagging of goods or animals.

RFID stands for *radio frequency identification*. It is a widely varied collection of technologies for various applications, ranging from the high-speed reading of railway containers to applications in retail that can be regarded as a potential successor to the bar-coding technologies in use today to identification of animals in farms. RFID is based around radio or electromagnetic propagation. This has the ability to allow energy to penetrate certain goods and read a tag that is not visible thereby to identify those goods remotely, either in the form of an identity code or more simply that something is present (EAS). Different frequencies of the radio system result in different reading ranges and properties of the system.

Commonly available tags have an operating frequency in the range from 60kHz to 5.8GHz depending on application. In operation one can generally say that there are three different types of technologies being implemented. They are:

- Magnetic based RFID technologies
- EAS based technologies
- Electric field based RFID technologies

Electric field coupled transponders generally provide vastly  
5 increased ranges over their magnetic counterparts. Rather than  
being limited to the ranges of the lines of force emitting  
from a magnetic field generator, they use the electric field  
propagation properties of radio communication to convey energy  
and data from the reader to the transponder and data from the  
10 transponder to the reader.

Electric field propagation requires antenna systems that are  
typically half a wavelength of the operating frequency in  
size. (150cm at 100MHz, 15 cm at 1GHz, 5 cm at 2.5Ghz and 2.5cm  
at 5.8Ghz). This causes practical limits to how low a  
15 frequency to start using E-field propagation methods due to  
the size of the antenna.

Higher operating frequencies require more expensive components  
and loose the ability to transfer energy at a rate of the  
inverse of the wavelength squared.

20 In addition, the energy density of a signal radiated using  
electric field coupling, decreases as the inverse of the  
distance squared between the source and the transponder.  
Whereas sensitive receivers can compensate for this loss of  
energy for the data communications over long distances,  
25 passive transponders which use the reader's energising field  
as a source of power are practically limited to maybe ten  
meters (say at 400 MHz). Beyond that distance (which reduces  
drastically with increased frequency to less than 1 meter at  
2.5GHz) it is necessary for the tags to use an external  
30 battery as a source of power.

Electric field tags are available in many different configurations and price ranges, particularly dependant on the complexity of the transponder. If the transponder is a read/write transponder and is required to operate beyond the range of passive transponders, the receiver circuitry onboard can be expensive and difficult to construct particularly if frequency stability is needed with temperature.

However the invention of the backscatter modulation principle at Lawrence Livermore Laboratories in the 1960s and the skills of semiconductor designers to shrink all features into cheap integrated circuits, has meant that electric field type tags in a read only mode can be made extremely cheaply, most probably for less than 10 US cents in high volume. Such a tag would be passive, have no onboard tuned circuits, be read only, consist of a single integrated circuit and a simple antenna, would operate at any of a range of frequencies, be temperature insensitive, and would broadcast a large data value when illuminated by a reader's energising field. In such a system the reader is complex because it provides the frequency stability, the energy of the system, and the receiver selectivity to receive the weak return communications, but the tags are very cheap. This is ideal for the situations where there is one reader and many tags, such in large herds of farm animals.

Electric field tags need to operate in an ordered spectrum management system as their radiated energy (particularly from the reader) can be detected by other sensitive receivers far away and cause possible interference.

Recent developments in passive tag technology see the amount of power needed to power up the tag dropping dramatically. The reader radiates energy from its transmit antenna, some of which is collected by the tag in an area around its antenna

called the "antenna's aperture". The size of this area is dependant upon the characteristics of the tag antenna and the operating frequency of the system, (e.g. a 915MHz dipole has a 134cm<sup>2</sup> aperture). Traditionally a 5 volt logic circuit in a transponder would need 55 milliwatts of RF energy to operate while recent developments see this amount of power dropping to less than 1 milliwatt, thereby dramatically reducing the power needed by the reader and increasing the range over which passive transponders can operate effectively.

A separate category also exists of "active" tags (battery powered). These tags are "beacon" tags, that is they are not interrogated by a reader, but wake themselves up from a low power "sleep mode" periodically and broadcast their identity before returning to "sleep mode". By broadcasting on a fixed frequency, a sensitive receiver tuned to that frequency and within close proximity to the tag will receive the identity message. This type of transponder offers ranges up to hundreds of meters, but is not suited for situations where the location of a tag is being determined to a couple of meters range, or where very many tags are present in the reader zone. Encryption technology has also been added to these systems to stop unwanted tags being accepted as valid codes by the reader.

Despite the hurdles, the greater range, higher data rates and new technologies make these transponders suitable for a great number of applications.

As can be understood from the description of prior art above a number of different transponder systems or schemes are present and more are continuously developed. Most of these systems continue to push intelligence towards the reader to be able to produce simple and cheap transponders or tags. It would thus be beneficial if a reader could be designed to handle

transponders from several different systems without expensive hardware modification and preferably in a dynamic manner.

#### SUMMARY OF THE INVENTION

5 It is a main object of the present invention to provide such apparatus and method that at least alleviate the above problems.

10 It is in this respect a particular object of the invention to provide such an apparatus and method that can in a simple and cost-effective way read transponders from different systems implementing different communication protocols.

It is still a further object of the invention to provide such apparatus and method that can read transponders from different systems implementing different communication protocols in a dynamic manner.

15 These objects among others are, according to a first aspect of the present invention, attained by a transponder reader arranged to read data from transponders, wherein said transponders send data according to one transponder signalling protocol. The transponder signalling protocol may be selected  
20 from a number of different transponder signalling protocols.

Since the reader is designed to recognise transponders or tags from different systems, one reader may handle herds of animals wherein different animals wear tags from different transponder systems.

25 The transponder reader comprises an antenna means for sending a first analogue signal to one of said transponders and receiving a second analogue signal from said transponder, said transponder reader further comprises means for analysing, e.g.



demodulating, detecting, decode and transmitting said signal received by said antenna means to post-processing means.

The first analogue signal is the signal to energise a passive transponder, or to activate a semi-passive transponder. The first analogue signal is occasionally denoted activation signal. The first analogue signal may be continuous or intermittent for full-duplex and half-duplex systems, respectively. The second analogue signal is the signal sent from the transponder containing identification information to be deduced by the reader using demodulation, detection and decoding, to be described later. The reader may then send the information to post-processing means such as a database for storing the information.

The transponder reader comprises a digital processing means, an analogue to digital converter arranged to receive said second analogue signal from said antenna means, convert said second analogue signal to a first digital signal and supply said first digital signal to said digital processing means. The digital processing means comprises analysing means e.g. demodulating, detecting and decoding means arranged to demodulate, detect and decode digital signals received according to at least two different transponder signalling protocols, and the digital processing means receives, demodulates, detects and decodes said first digital signal and then transmits said decoded signal to said post-processing means.

By transforming the received signal to the digital domain, digital processing means can be utilised to process the digital signal by any appropriate method, that is, according to one selected protocol from a multitude of protocols.

These objects among others are, according to a second aspect of the present invention, attained by a method for reading read data from transponders, wherein each of said transponder send data according to one transponder signalling protocols, 5 the transponder signalling protocol may be selected from a number of different transponder signalling protocols.

The method comprises sending a first analogue signal to one of said transponders and receiving a second analogue signal from said transponders using an antenna means, demodulating, 10 detecting, and decoding said signal received by said antenna means and sending said signal to post-processing means.

The method is further characterised in the steps of converting said second analogue signal from the analogue domain to a first digital signal in the digital domain and supplying said 15 first digital signal to digital processing means, wherein said digital processing means comprises demodulating, detecting and decoding means arranged to demodulate, detect and decode digital signals received according to at least two different transponder signalling protocols. The method continues to 20 demodulate, detect and decode said first digital signal according to a selected transponder system and transmit said decoded signal to said post-processing means.

According to a preferred embodiment the antenna means comprises means for controlling the antenna characteristics 25 and a digital interface for receiving and transmitting digital messages from said digital processing means. The antenna means controls said antenna characteristics in dependence of said received digital messages, and/or transmits digital messages relating to the antenna characteristics to said digital 30 processing means.

By this arrangement the antenna characteristics may be controlled and adjusted to the circumstances prevailing. For instance may the amplification be tuned in dependence of the specific transponders used or the expected distance from the reader for the specific application of the transponder reader.

In the application for identifying lactating animals in a milking stall it is common that more than one transponder reader are positioned in relatively close proximity. In these cases the readers may disturb each other in a number of different ways. The antenna characteristics may then be controlled and adjusted to minimize the disturbances from the second reader during reading of the transponder as well as to disturb the second reader to a minimal extend when energizing transponders. By controlling the phase of the activation signal for each transponder reader so that they are coherent, minimal interference will occur between the transponder readers.

For instance may the transponder reader set antenna characteristics in dependence of detected environmental characteristics so as to achieve optimal signalling detection quality in relation to the electromagnetic environment.

According to one embodiment of the invention the protocols can be half-duplex protocols, full-duplex protocols or propriotor protocols. By designing a transponder reader according to the invention it is possible to have one single reader, which may be used for different protocols.

According to one embodiment of the transponder reader according to the invention the digital processing means supply second digital signals to a digital-to-analogue converter for converting said second digital signal to said first analogue signal, and the digital-to-analogue converter supplies said

first analogue signal to the antenna means for transmission. Thus the digital processing means may control the characteristics of the energising signal sent from the antenna for energizing transponder. This may for instance be utilised  
5 for sending control signals to transponders or simply to change the frequency of the energising signal (activation signal).

According to yet a further embodiment of the invention the digital processing means comprises means for demodulating a  
10 signal according to several different methods. These may be implemented as different blocks or may be different parts of the same block in the digital processing means. The digital processing means may select which demodulating method to be used in different ways. In one embodiment the selection is  
15 made automatically and dynamically so that the digital processing means selects the method, which is best according to a specific criteria. According to another embodiment an operator selects which method to use.

According to yet a further embodiment of the invention the digital processing means comprises means for detection of  
20 symbols from said demodulated digital signal and means for decoding symbols from said detected symbols according to several schemes. These may be implemented as different blocks or may be different parts of the same block in the digital  
25 processing means.

Since the digital processing means comprises several different demodulation, detection and decoding means the transponder reader is very flexible and is able to read different transponders.

The transponder reader may select the demodulating, detection, and decoding means that produces the best signal detection quality. Decoding may be simple CRC.

According to another embodiment of the invention, where a full-duplex protocol is used the transponder reader may comprise means for subtracting the first analogue signal from the second analogue signal to remove the contribution from the first analogue signal, transmitted by the antenna from the reception of said second analogue signal received by the antenna. The first analogue signal may be boosted and/or delayed before subtraction. By this arrangement a more prominent response signal can be received from the transponder since in full-duplex systems the energizing signal, i.e. the first analogue signal, is transmitted continuously, i.e. even at the reception of the signal from the transponder. Since the first analogue signal is stronger, i.e. has higher amplitude, than the second signal, the second signal may drown if the first signal is not subtracted.

According to one embodiment of the invention the transponder reader comprises means for deciding which transponder signalling protocols that said transponder is using. This may be performed in different ways. For instance may the transponder reader read a first transponder in a start up sequence and that said transponder reader then assumes that all subsequently read transponders are working according to said detected protocol or an operator may select the appropriate transponder signalling protocol. As an alternative the transponder reader may decide dynamically, for each transponder, which protocol to be used. This decision may be based on, for instance the detection rate or signal-to-noise ratio.

Further characteristics of the invention and advantages thereof will be evident from the following detailed description of embodiments of the invention.

#### **BRIEF DESCRIPTION OF THE DRAWINGS**

- 5 The present invention will become more fully understood from the detailed description of embodiments of the present invention given herein below and the accompanying Figs. 1 to 10, which are given by way of illustration only, and thus are not limitative of the present invention.
- 10 Figure 1 shows a schematic side view of a transponder reader system according to the present invention.
- Figure 2 shows a block diagram of a preferred embodiment according to the present invention.
- Figure 3 shows a block diagram of the interface between the  
15 antenna means and the processing means in greater detail.
- Figure 4 shows a block diagram of the interface between the antenna means and the processing means in greater detail.
- Figure 5 shows a block diagram of the processing means  
20 according to a preferred embodiment of the invention in greater detail.
- Figures 6 and 7 show block diagrams for detecting implemented in the processing means according to the invention.
- Figures 8 and 9 show two different telegram layouts.
- Figure 10 shows a block diagram of the interface between the  
25 processing means and the antenna means according to another preferred embodiment of the invention.

**PREFERRED EMBODIMENTS**

In the following description, for purposes of explanation and not limitation, specific details are set forth, such as particular techniques and applications in order to provide a  
5 thorough understanding of the present invention. However, it will be apparent to one skilled in the art that the present invention may be practiced in other embodiments that depart from these specific details. In other instances, detailed descriptions of well-known methods and apparatuses are omitted  
10 so as not to obscure the description of the present invention with unnecessary details.

Figure 1 shows a schematic side view of an arrangement according to the present invention. A transponder reader 101 is connected to processing means 102, which in turn is  
15 connected to post-processing means 103. In the application of registration of lactating animals the post-processing means may for instance include a database for registration of data relating to each identified animal. The purpose of the transponder reader 101 and the processing means 102 are to  
20 identify an animal passing through the reader 101 in the direction indicated by the arrow 104. The animals may for instance be on their way to a milking station, where further data may be registered and conveyed to the post-processing means 103 for storage in the database (not shown).

25 Figure 2 shows a schematic block diagram of an embodiment according to the present invention. An antenna module 201 comprises the actual antenna as well as analogue, and in one embodiment, digital circuitry. The antenna module comprises means for adjusting the antenna characteristics, such as  
30 matching circuits, means for connecting or disconnecting parasitic elements, as well as regulating the output power or the signal form and radiation pattern. This is used for

adapting the antenna to send and receive signal in specific frequency bands, in full- or half-duplex, or modify the radiation pattern so as to not disturb, or at least to disturb less, closely positioned electronic devices, including other  
5 transponder readers.

The antenna module 201 communicates with the processor module 202, to be discussed in detail below, which in turn is in communication with a data bus module 203 adapted for communication with other processing means (not shown) as  
10 discussed above.

Figure 3 discloses a schematic block diagram of an embodiment according to the invention. In this embodiment, a digital interface 303 is implemented between an antenna module 301 and a processor module 302 besides to transmission and receiving  
15 links,  $T_x$  and  $R_x$  respectively. Thus the processor module 302 may instruct the antenna module to set particular antenna characteristics in dependence of calculated and detected circumstances. For instance may the processor module 302 analyse the signal  $R_x$  and conclude that the signal-to-noise  
20 ratio would improve if the antenna characteristics would change to a calculated extent. Thus, the processor module 302 can send a message according to this conclusion to the antenna module 301, which will adapt the antenna characteristics.

Figure 4 shows the signal interface between an antenna module  
25 401 and a processor module 402 in greater detail, where a A/D-converter 403 converts the analogue signal  $R_x$ , received by the antenna module 401, to a digital signal  $R_{xd}$  which is fed to the processor module 402. A D/A-converter converts a digital signal  $T_{xd}$ , construed in the processing module 402, into an  
30 analogue signal  $T_x$  to be transmitted by the antenna module 401. Thus, the processor module is working in the digital domain



whereas the antenna module, with respect to received and transmitted signals, work in the analogue domain.

Figure 5 shows the processor module in greater detail in a block diagram according to an embodiment of the invention. The processor module comprises first and second demodulation blocks 501 and 502, first and second detecting blocks 503 and 504, and first and second decoding blocks 505 and 506.

The demodulation modules 501 and 502 each comprises code, implemented in hardware or software, to implement demodulation according to different methods or schemes. For demodulation this may include different filters for down-converting the received signal  $R_{xd}$  to a baseband. The different blocks may include different filters, and each block may be designed to deal with signals from a special transponder signalling in one or two frequency bands, which may be different for different transponders.

Below is table 1, which lists different characteristic for two different exemplary transponder systems.

Parameter	FDX-transponder	HDX-transponder
Activation frequency	134,2 kHz	134,2 kHz
Modulation	AM	FSK
Returned Frequency	129,0 to 133,2 kHz 135,2 to 139,4 kHz	124,2 kHz (1) 134,2 kHz (0)
Channel Coding	Modified DBP	None
Symbol Time	0,23845 ms	0,1288 ms for "1" 0,1192 ms for "0"

Bit rate	4194 Hz	7762,5 Hz for "1" 8387,5 Hz for "0"
Number of bits in message	128	112

The detection modules 503 and 504 each comprises code, implemented in hardware or software, to implement detection of symbols according to different methods or schemes. To be further described in connection with figures 6 and 7. The  
5 outcome of detection is a sequence of bits called a telegram.

Finally, the decoding modules 505 and 506 each comprises code, implemented in hardware or software, to implement decoding of the telegram according to different methods or schemes. The telegram is analysed and the ID-code is resolved. In figures 8  
10 and 9 are two different telegrams disclosed. The first task in decoding may for instance be to compare the leading bits of the telegram with a known preamble. If the leading bits do not match the preamble the telegram is rejected or considered invalid. Telegrams according to different transponder systems  
15 comprise different preambles. The integrity of the telegram is checked next for instance with error detection bits in the telegram. This integrity test may also differ for different systems.

Which demodulation, detection and decoding modules to use may  
20 be selected in different ways. For instance may an operator select the system in which the transponder reader should work which will determine, for instance by using a database, which modules to use.

In a preferred embodiment the processor module 202 comprises  
25 an evaluation and selection module 507. The evaluation and selection module (ESM) controls the selection of the other

modules and may for instance order a specific set of modules to handle the reception of a signal. Different characteristics are calculated, such as signal-to-noise ratio, bit error rate, telegram rejection rate etc, and saved. This may be performed  
5 for a number of different occasions and the different results compared. The ESM then selects the combination of modules that will give the best performance of the reader for further detection of transponders.

The ESM may also be adapted to characterise interference in  
10 the environment and possibly adapt and control the antenna characteristics accordingly or recognise defective transponders and alarm an operator.

In one embodiment the ESM uses a number of different combinations of modules until a combination results in a valid  
15 telegram. This telegram is then forwarded as a valid telegram on the data bus.

Figure 6 and 7 each disclose in block diagram a different decoding scheme to be implemented by each detection module 503 and 504, respectively. Figure 6 disclose a detection method  
20 suitable to use for a half-duplex transponder using two different frequencies  $f_0$  and  $f_1$  to represent a "0" and a "1", respectively. Figure 7 shows a detection method where no signal indicates a "1" and a signal with frequency  $f_0$  indicates a "0". Both these methods are known per se and are therefore  
25 not further discussed.

The processor module may comprise several more of each demodulating, detection and decoding modules all implementing different methods for performing tasks according to different transponder reader systems.

30 Figure 10 shows a block diagram of the interface between antenna means 1001 and processing means 1002 according to the

invention when a full-duplex protocol is used. In this embodiment the  $T_x$  signal is subtracted from the received signal  $R_x$  to form a new modified received signal  $R_{xm}$ . By this operation the signal  $R_{xm}$  is more easily demodulated and is not so  
5 difficult, that is, do not require as many valid digits, to resolve.

It will be obvious that the invention may be varied in a plurality of ways. Such variations are not to be regarded as a departure from the scope of the invention. All such  
10 modifications as would be obvious to one skilled in the art are intended to be included within the scope of the appended claims.

**CLAIMS**

1. A transponder reader arranged to read data from transponders, wherein each of said transponders send data according to one transponder signalling protocols,

5 - said transponder signalling protocol is selected from a number of different transponder signalling protocols, and

- a first and a second transponder signals according to the same or different protocols,

- said transponder reader comprises an antenna means for sending a first analogue signal to one of said

10 transponders and receiving a second analogue signal from said transponders, and

- said transponder reader further comprises means for analysing said signal received by said antenna means

15 **characterised in that**

- said transponder reader comprises a digital processing means,

- said transponder reader comprises an analogue to digital converter arranged to receive said second

20 analogue signal from said antenna means, convert said second analogue signal to a first digital signal and supply said first digital signal to said digital processing means,

- said digital processing means comprises analysing means

25 arranged to analyse said received digital signals according to at least two different transponder signalling protocols.

2. The transponder reader according to claim 1, wherein said

30 analysing means comprises first demodulating, detecting and decoding means for demodulating, detecting and decoding digital signals according to a first transponder

signalling protocol and second demodulating, detecting and decoding means for demodulating, detecting and decoding digital signals according to a second transponder signalling protocol

- 5        3. The transponder reader according to claim 1 or 2, wherein said transponder reader further comprises transmitting means for sending said analysed first digital signal to post-processing means.
- 10       4. The transponder reader according to any of claims 1-3, wherein
- said antenna means comprises means for controlling the antenna characteristics,
  - said antenna means comprises a digital interface for receiving digital messages from said digital processing means and transmitting digital messages to said digital processing means,
  - 15       - said antenna means controls said antenna characteristics in dependence of said received digital messages, and
  - 20       - said antenna means transmit digital messages relating to the antenna characteristics to said digital processing means.
- 25       5. The transponder reader according to claim 4, wherein said digital messages comprises information selected from the group of information comprising: antenna ready to send, antenna on line, output amplification, and frequency tuning coefficients.
- 30       6. The transponder reader according to any of claims 1-5, wherein
- each of said at least two protocols are selected from the group of protocols including: half-duplex protocols,

full-duplex protocols, proprietor protocols (B-protocol) and read/write protocols.

7. The transponder reader according to any of the claims above, wherein

- said digital processing means supply second digital signals to a digital to analogue converter for converting said digital signal to said first analogue signal,
- said digital to analogue converter supplies said first analogue signal to said antenna means for transmission.

8. The transponder reader according to claim 1 or 2, wherein

- said digital processing means comprises means for demodulating said first digital signal according to a first and at least a second demodulation scheme.

9. The transponder reader according to claim 8, wherein

- said digital processing means comprises means for detection of symbols from said demodulated digital signal according to a first and at least a second symbol detection scheme.

10. The transponder reader according to claim 9, wherein

- said digital processing means comprises means for decoding symbols from said detected symbols according to a first and at least a second symbol decoding scheme.

11. The transponder reader according to claim 10, wherein

- said decoding comprises or consists of performing an error detection check e.g. a cyclic redundancy check.

12. The transponder reader according to claim 10, wherein

- said transponder reader comprises means for detecting which of said first and at least second means for demodulating, detection, and decoding that produces the best signal detection quality and using said means.

13. The transponder reader according to claim 10, wherein  
- an operator selects which demodulator, detector and  
decoder to be used by said digital processing means.

14. The transponder reader according to claim 1, wherein  
- said one of at least two different transponder  
signalling protocols is a full duplex protocol, and  
- said first analogue signal is subtracted from said  
second analogue signal to remove the contribution from  
the first analogue signal from the reception of said  
second analogue signal.

15. The transponder reader according to claim 14, wherein  
- said first analogue signal is boosted before being  
subtracted from said second analogue signal.

16. The transponder reader according to claim 1, wherein  
- said transponder reader comprises means for deciding  
which of at least said two different transponder  
signalling protocols that said transponder is using in  
responding to said first analogue signal, and using said  
protocol.

17. The transponder reader according to claim 16, wherein  
- said decision is performed in a start up sequence and  
that said transponder reader assumes that all  
transponders are working according to said detected  
protocol.

18. The transponder reader according to claim 1, wherein  
- an operator selects the appropriate transponder  
signalling protocol.

19. The transponder reader according to claim 4, wherein  
- said transponder reader comprises means for setting  
antenna characteristics in dependence of detected



environmental characteristics so as to achieve optimal signalling detection quality in relation to the electromagnetic environment.

20. The transponder reader according to claim 9, wherein  
5 - the phase of said first analogue signal is controlled.

21. A method for reading data from transponders, wherein each of said transponders send data according to one transponder signalling protocols,  
10 - said transponder signalling protocol is selected from a number of different transponder signalling protocols, and  
- a first and a second transponder signals according to the same or different protocols, comprising  
- sending a first analogue signal to one of said transponders and receiving a second analogue signal from  
15 said transponders using an antenna means, and  
- analysing said second analogue signal received by said antenna means,

**characterised in the steps of:**

20 - converting said second analogue signal from the analogue domain to a first digital signal in the digital domain,  
- supplying said first digital signal to digital processing means,  
- analysing said received first digital signal using said  
25 digital processing means for establishing which of at least two different transponder signalling protocols said transponder uses,  
- selecting said established one of said at least two different transponder signalling protocols, and  
30 - analysing said first digital signal according to said selected transponder signalling protocol.

22. The method according to claim 21, wherein said analysing comprises demodulating, detecting and decoding digital signals according to a first and at least a second transponder signalling protocol.

5 23. The method according to claim 21 or 22, further comprising the step of sending said analysed first digital signal to post-processing means.

24. The method according to claim 21, wherein  
- said antenna means comprises means for controlling the  
10 antenna characteristics,  
- said antenna means comprises a digital interface for receiving digital messages from said digital processing means and transmitting digital messages to said digital processing means, and characterised by the further steps of  
15 of  
- controlling said antenna characteristics in dependence of said received digital messages, and  
- transmitting digital messages from said antenna means relating to the antenna characteristics to said digital  
20 processing means.

25. The method according to claim 24, wherein said digital messages comprises information selected from the group of information comprising: antenna ready to send, antenna on line, output amplification, and frequency  
25 tuning coefficients.

26. The method according to any of claims 21-25, wherein  
- each of said at least two protocols are selected from the group of protocols including: half-duplex protocols, full-duplex protocols, proprietor protocols (B-protocol),  
30 and read/write protocols.

27. The method according to any of claims 21-26, wherein

- supplying second digital signals, from said digital processing means to a digital to analogue converter for converting said digital signal to said first analogue signal,

- supplying said first analogue signal, from said digital to analogue converter to said antenna means for transmission.

28. The method according to claim 21, wherein

- said digital processing means comprises means for demodulating said first digital signal according to a first and at least a second demodulation scheme.

29. The method according to claim 28, wherein

- said digital processing means comprises means for detection of symbols from said demodulated digital signal according to a first and at least a second symbol detection scheme.

30. The method according to claim 29, wherein

- said digital processing means comprises means for decoding symbols from said detected symbols according to a first and at least a second symbol decoding scheme.

31. The method according to claim 30, wherein

- said decoding comprises or consists of performing a error detection check e.g. a cyclic redundancy check.

32. The method according to claim 30, comprising the steps of:

- detecting which of said first and at least second means for demodulating, detection, and decoding that produces the best signal detection quality and using said means.

33. The method according to claim 30, wherein  
- an operator selects which demodulator, detector and  
decoder to be used by said digital processing means.

34. The method according to claim 21, wherein  
- said one of at least two different transponder  
signalling protocols is a full duplex protocol, and  
characterised in the further steps of:  
- subtracting said first analogue signal from said second  
analogue signal to remove the contribution from the first  
analogue signal from the reception of said second  
analogue signal.

35. The method according to claim 34, comprising the step  
of:  
- boosting said first analogue signal before subtracting  
said first analogue signal from said second analogue  
signal.

36. The method according to claim 21, comprising the step  
of:  
- deciding which of at least said two different  
transponder signalling protocols that said transponder is  
using in responding to said first analogue signal and  
using said protocol.

37. The method according to claim 36, comprising the step  
of:  
- performing said decision in a start up sequence and  
assuming that all transponders are working according to  
said detected protocol.

38. The method according to claim 21, wherein  
- an operator selects the appropriate transponder  
signalling protocol.

39. The method according to claim 24, comprising the step of:

- setting antenna characteristics in dependence of detected environmental characteristics so as to achieve optimal signalling detection quality in relation to the electromagnetic environment.

40. The method according to claim 24, wherein

- controlling the phase of said first analogue signal.

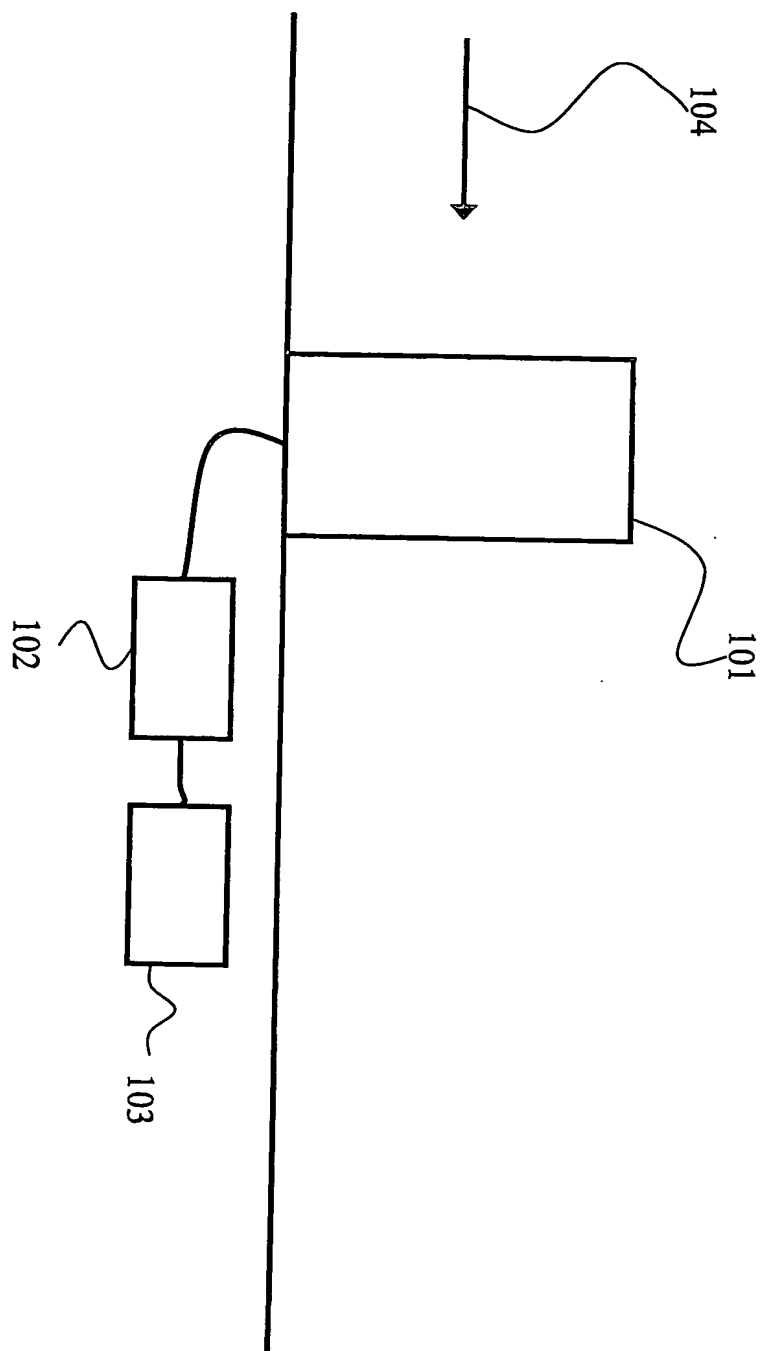


Fig. 1

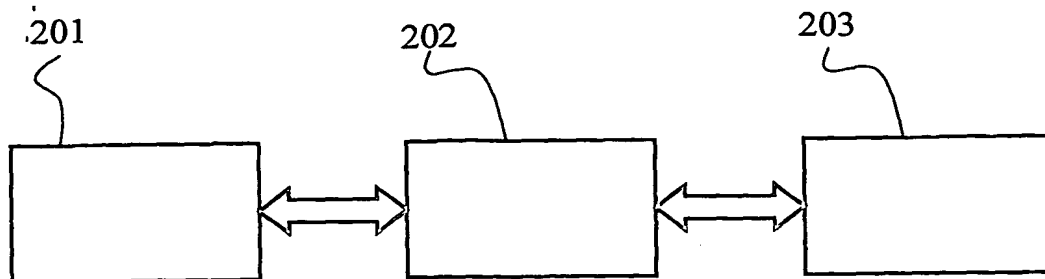


Fig. 2

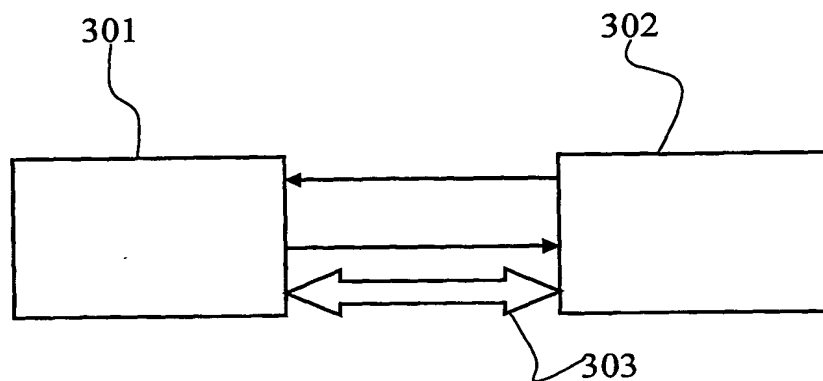


Fig. 3

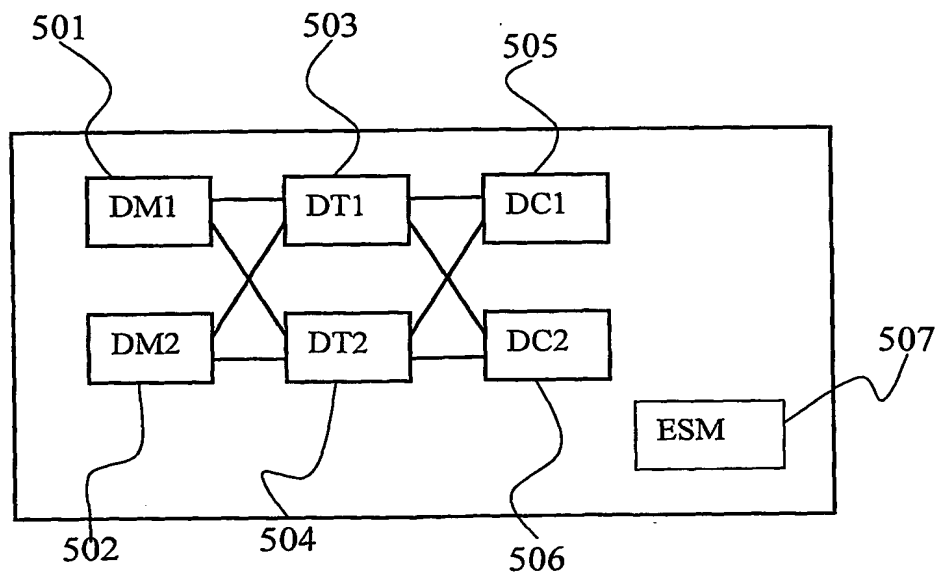


Fig. 5

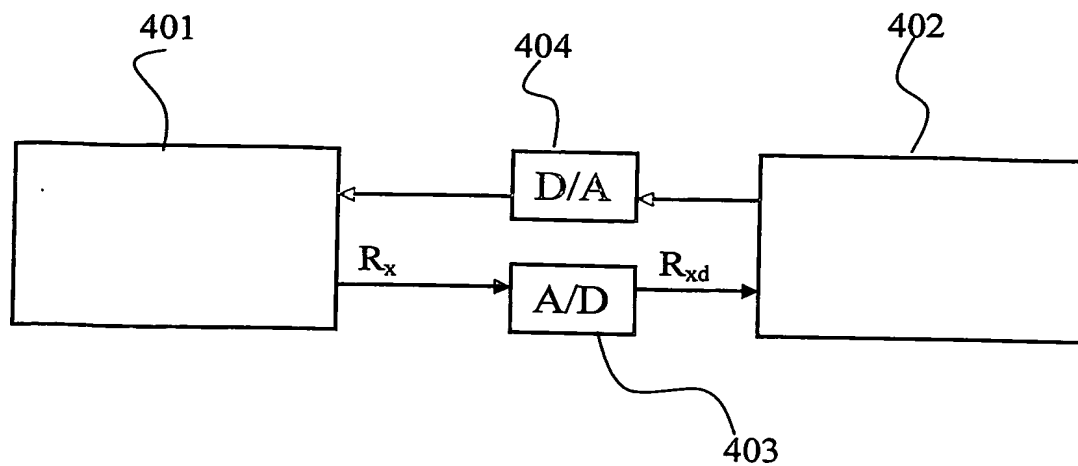


Fig. 4

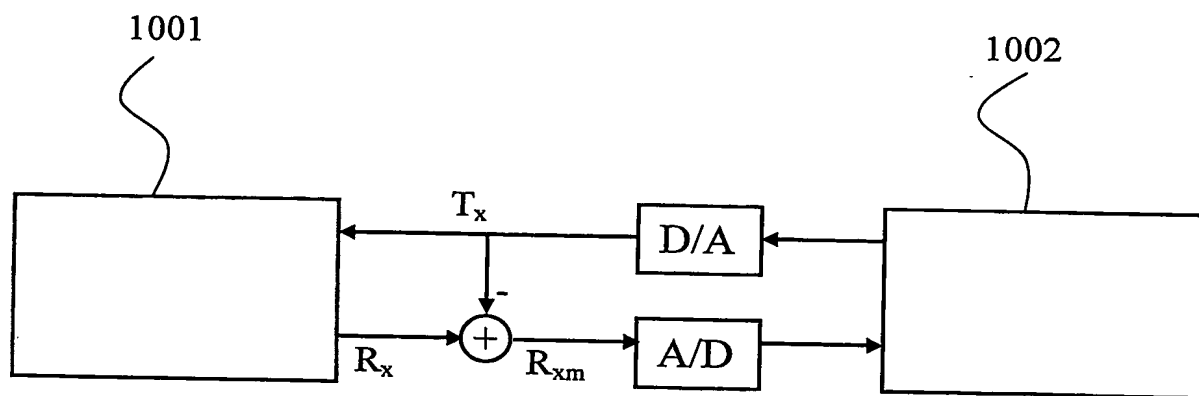


Fig. 10



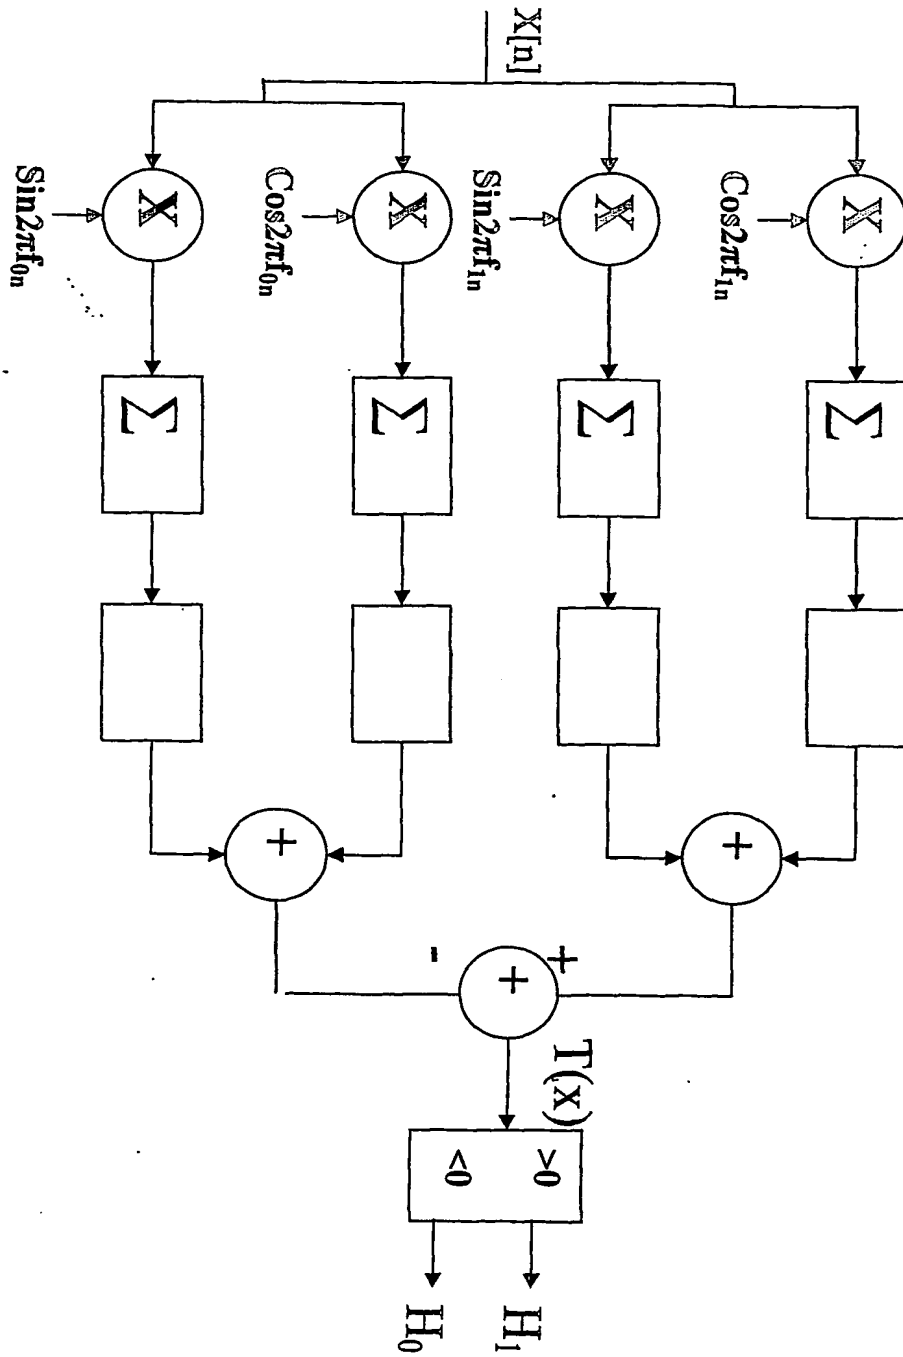


Fig. 6

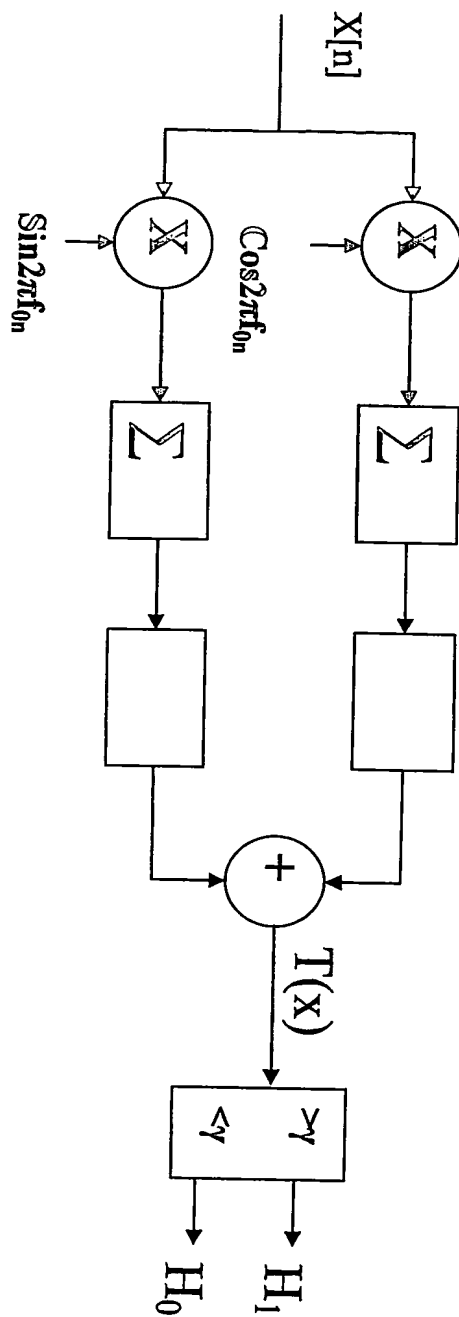


Fig 7

Start Sequence (11 bits)											Block 1 (9 bits)					Block 2 (9 bits)					Block 13 (9 bits)								
0	0	0	0	0	0	0	0	0	0	0	x	x	x	x	x	1	x	x	x	x	x	1	x	x	x	x	x	1	
.....																													

Fig. 8

Start Sequence (8bits)								Identity Code (64 bits)								CRC (16 bits)								Not Used (24 bits)							
0	1	1	1	1	1	0	x	x	x	...	x	x	x	x	x	x	...	x	x	x	x	x	x	...	x	x	x	x			

Fig. 9

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 2004/000550

## A. CLASSIFICATION OF SUBJECT MATTER

IPC7: H04L 29/06, H04Q 11/00

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: H04L, H04Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-INTERNAL, WPI DATA, PAJ

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 0219251 A1 (RF CODE, INC.), 7 March 2002 (07.03.2002), page 2, line 10 - page 3, line 18; page 5, line 32 - page 6, line 6; page 6, line 34 - page 7, line 8  --	1-40
A	WO 0043803 A2 (RF CODE, INC.), 27 July 2000 (27.07.2000), abstract  -- -----	1-40

☐ Further documents are listed in the continuation of Box C.☒ See patent family annex.

\* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "B" earlier application or patent but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

14 June 2004

Date of mailing of the international search report

02 -07- 2004

Name and mailing address of the ISA/  
Swedish Patent Office  
Box 5055, S-102 42 STOCKHOLM  
Facsimile No. +46 8 666 02 86

Authorized officer

Stefan Hansson/Els  
Telephone No. +46 8 782 25 00

## INTERNATIONAL SEARCH REPORT

Information on patent family members

30/04/2004

International application No.

PCT/SE 2004/000550

WO	0219251	A1	07/03/2002	AU	8829701	A	13/03/2002
				CA	2421069	A	07/03/2002
				EP	1314130	A	28/05/2003
				JP	2004507850	T	11/03/2004

---

WO	0043803	A2	27/07/2000	AU	1750300	A	07/08/2000
				AU	2162600	A	07/08/2000
				AU	2162800	A	07/08/2000
				AU	2351400	A	07/08/2000
				AU	2707300	A	07/08/2000
				AU	2707400	A	07/08/2000
				CA	2361145	A	27/07/2000
				DE	69906388	D,T	12/02/2004
				DE	69915370	D	00/00/0000
				EP	1145371	A	17/10/2001
				EP	1147603	A,B	24/10/2001
				EP	1149305	A	31/10/2001
				EP	1153315	A	14/11/2001
				EP	1153316	A	14/11/2001
				EP	1153317	A,B	14/11/2001
				EP	1286179	A	26/02/2003
				JP	2002535904	T	22/10/2002
				US	6340932	B	22/01/2002
				US	6351215	B	26/02/2002
				US	6362737	B	26/03/2002
				US	2001038332	A	08/11/2001
				US	2002011932	A	31/01/2002
				US	2002033757	A	21/03/2002
				WO	0043804	A	27/07/2000
				WO	0043805	A	27/07/2000
				WO	0043944	A	27/07/2000
				WO	0044064	A	27/07/2000
				WO	0044091	A	27/07/2000
				US	6621410	B	16/09/2003

---